

# KG Block




KG Blocks are typically used for isolating Heavy Machinery from a buildings structure. They provide high levels of flexibility in both the vertical and horizontal direction, making them particularly suited to Low Frequency equipment. The design of the rectangular section allows them to be fitted under structural frames.

## Advantages:

- Isolates Low Frequency Machines
- Ideal for Isolating Structures
- Wide Load Range

## Applications:

- Floating Structures
- Concrete Inertia Bases
- Heavy Industrial Machinery
- Manufacturing Plants

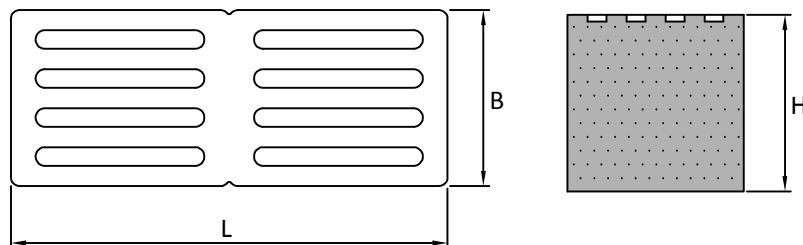

Part No	L	B	H	Max Load (kg)
KG0-40	195	175	150	1,800
KG0-60	195	175	150	3,800
KG1-40	400	175	150	4,000
KG1-60	400	175	150	8,000

Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.